

PR3-E-150KW & 180KW 3-PHASE BURST FIRE POWER CONTROLLER INSTALLATION INSTRUCTIONS

**PR3-E
SERIES**

X10759

INTRODUCTION

The PR3 range of thyristor stacks provides full seamless control of three phase resistive loads, using two thirds control technique. Signal control is by a DC signal. These burst firing control stacks use fast pulse zero volts switching technology, to minimise flicker and eliminate RFI problems. They also incorporate an automatic resetting temperature trip, integral semiconductor fuses and heatsink. The 150KW & 180kW models are the same physical size and have easy access to signal & power terminals for simple installation.

APPLICATIONS

Suitable for 3-wire, 3-phase floating-star or closed-delta configured resistive loads. This includes the Heating, Ventilating and Air Conditioning (HVAC) market for air curtain applications, but also for furnaces, ovens, dryers and hot plates.

FUNCTIONS

Alarm relay functions (3-way terminal – V/free alarm “NO_NC_C”)

The alarm circuit has 'voltage free' relay contacts and are rated up to 2A @ 125V ac (RMS) load. Connection is via the PCB terminal.

For alarm relay status options see SPECIFICATIONS.

Note: The internal supply to the relay is obtained from the transformer via two 20mm 1A fuses. These are connected to the Black (L2) and Grey (L3) phases and therefore the relay and LED can only energise when there is an over-temperature condition, a sensor fault, or a phase loss on L1 phase. See Remote Supply Option section.

Over temperature protection

When a heatsink temperature of above 90°C is detected by the sensor, the alarms relay changes state and the status LED indicator flashes continuous rapid pulsing. The power to the load will be disconnected and will not return until the temperature drops to 85°C.

Temperature sensor loss

The Status LED indicator changes to continuous equal ON/OFF pulsing if the sensor fails.

Phase loss with auxiliary supply

When any one of the three phase inputs are missing, the relay changes state and the LED flashes with ON/OFF bursts of 1.5 seconds. This is only functional with a remote supply (see below).


Fault condition

The default setting of DIL switch (SW1) is in the ON position, the alarm relay will be energised under a fault condition. Changing SW1 to the off position will energise the alarm relay continuously until a fault condition occurs.

Remote supply


The unit will be factory set for an internal supply (SW4 in the “TX-INT” position). If there is a requirement for the alarm relay and LED to energise when a phase fault condition occurs, then there is provision for an external 24V ac or dc supply (SW4 in the “INT” position).

NOTE – If the remote supply is utilised, the main (L1, L2 and L3) supply must come on before this supply is switched on.

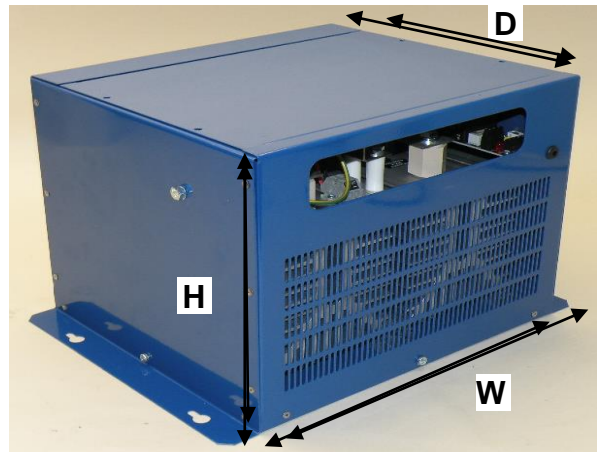

**RoHS Compliant
Directive
2002/95/EC**

CONNECTIONS & CONTROL OPTIONS

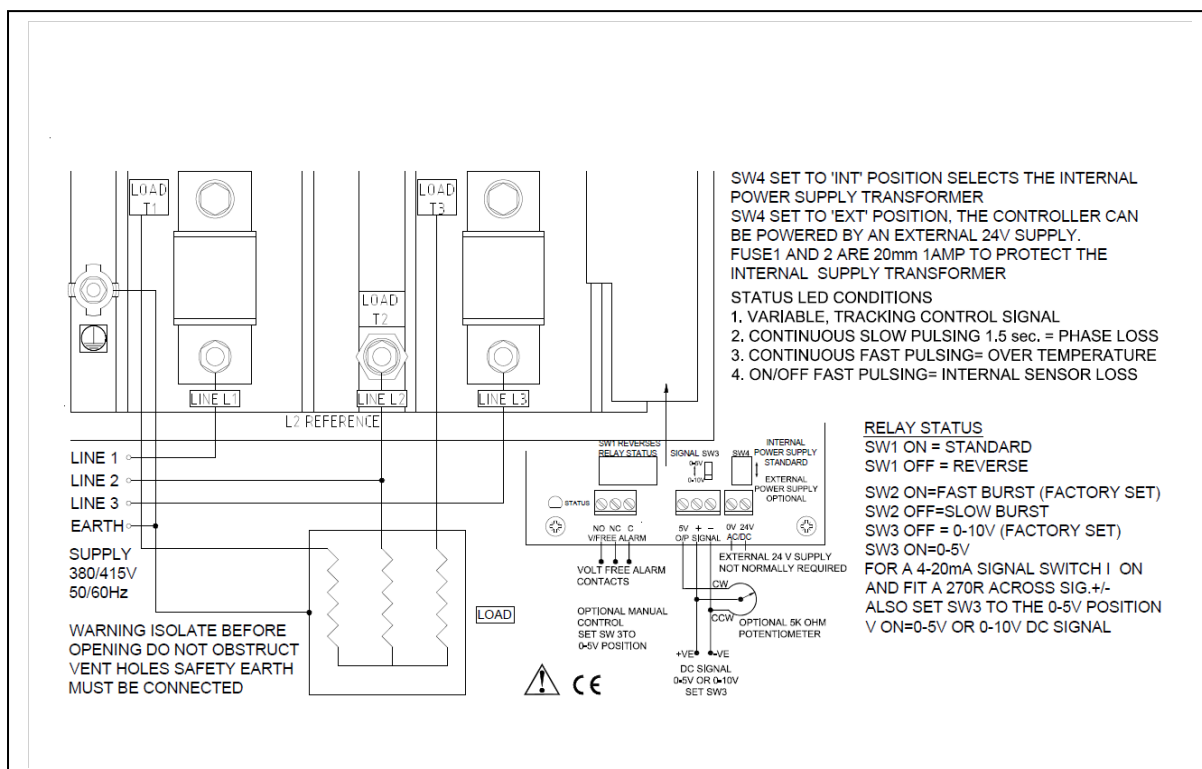

INSTALLATION

Cooling requirements

This robust stack assembly has an operational temperature of 65°C when naturally cooled and has a built in 90°C over temperature trip on the heatsink as a safety feature. The unit should be mounted vertically, with heatsink fins top to bottom, and with sufficient surrounding air space to maximise natural convection cooling. If the unit is mounted in an enclosure or cabinet, adequate ventilation and/or forced air-cooling should be fitted. This PR3-E – range have forced air cooling fans fitted, which are designed to be permanently “on” when in use.

Load considerations

The PR3 series of power controllers are designed for 3-wire, 3-phase floating-star or closed delta configured resistive loads. The PR3 series are 2-leg thyristor controllers and therefore unsuitable for 4-wire, 3-phase with star point to neutral configured loads. For further information on configured loads, see the ‘Application circuits’ section of our supporting datasheet – APC (ref. X10322).

Unusual heating loads such as Molybdenum, Platinum or Tungsten have a typical 10:1 hot to cold resistance ratio and therefore, when cold, draw larger currents than normal.

Connections

This unit has Power terminals and simple clamp type terminal connectors for all auxiliary wiring requirements (see SPECIFICATIONS below).

NOTE: It is factory set for an internal power supply. For alternative ‘voltage free’ alarm supply details see *Functions* section. Please contact our Technical support for further details.

Fusing & over temperature

It is recommended that fast acting semiconductor type fuses (as supplied) be used for protection. See SRA Data sheet X10255 for further information. It is recommended that a load break switch and a contact breaker is installed in the load supply. The supply to the contactor coil should be interrupted by an over-temperature thermostat located in the heater battery and also upon detection of airflow loss.

CE Marking

This family carries a “CE” marking. These burst fire controllers do not normally require a remote filter. For more information contact our sales desk. A Declaration of Conformity is available on request.

SPECIFICATIONS

- Power/(current ratings):** 150kW (210A) & 180kW (250A) @ a typical supply of 415V RMS
- Input voltage:** 400V RMS +/- 10%
- Frequency:** 50/60Hz
- Control input options:** **Signal (using SW3):** 0 to 10V dc (set as standard) / 0 to 5V; **OR Manual:** using 5K Potentiometer.
For 4-20mA signal: set **SW -I/V** to “ON”, fit 270R (0.25W) across SIG +/- and set **SW3** to 0-5V.
- Burst fire control options:** **Slow Burst:** 1 second proportional time base **Fast Burst:** variable and un-proportional time base.
- Alarm relay functions:** SW1 = “OFF” - Relay is continuously energised (normally closed); trips in fault condition.
The voltage free alarm circuit is rated for 125V ac @ 2A.
- Alarm relay status options:** SW1 = “ON” - Relay is de-energised (normally open); closes in fault condition.
- Status indicator:** (Tracking control signal) **status** LED indicator changes **intensity**
- Cooling fan:** 120mm² fan, 230V AC supply fitted as standard – other options available (i.e. 110V, & 24V ac).
- Over Temperature:** Trip in temperature @ 90°C, +/- 1°C (**Status** LED indicator ‘**flashes**’ with ON/OFF rapid pulsing)
Trip out temperature @ 85°C, +/- 1°C
- Phase loss detection:** **Status** LED indicator ‘**flashes**’ ON/OFF continuously in slow 1.5 second intervals.
- Sensor loss detection:** **Status** LED indicator ‘**flashes**’ ON/OFF continuously in equal intervals.
- Cable terminations:** (all internal) **Phase power:** M8 nut & washer stud terminal.
Earth: M6 nut & clamp washer stud terminal.
- Terminal torque settings:** **Remote supply Auxiliary alarm (relay):** 2.5mm² rising clamp terminal blocks.
Fusing: **Control signal:** 2.5mm² rising clamp terminal blocks.
- Working temperature:** **M8** @ 12 to 15Nm, **M6** @ 4.5 to 5.5Nm for power and earth terminals only.
High-Speed Semiconductor fuse : 250EET (250A) for 150kW or 315EET (315A) for 180kW
- Dimensions:** 266mm (D) x 345mm (W) x 250mm (H) – viewed.
- Fixing centres:** 4 x 5mmø holes on centres 322mm (W) x 160mm (L).
- Weight:** Approximately 15kg.

Note: SAFETY WARNING – Isolate supply before removing cover; Metal parts, in particular the heatsink, may get very hot when the unit is fully operational; DO NOT COVER enclosure ventilation slots.

RECOMMENDATIONS

Additional supporting documents, which may be appropriate for your application, are available on request. These include X10255: SRA – Safety Advise; X10213: ITA – Interaction (Causes & remedies for Burst fire & Phase Angle control).


NOTE:- It is recommended that installation and maintenance of this equipment should be carried out by suitably qualified/trained personnel with reference to the current edition of the I.E.E. wiring regulations (BS7671) The regulations contain important requirements regarding the safety of electrical equipment. For International Standards refer to I.E.C/ Directive IEC 950.

© *These products are protected by unregistered design with United Automation Limited, Southport, UK*

ORDER DETAILS

When ordering directly, please use the following stock codes:-

Manufacturer stock code	Product Description	Rating
A447444-HV	PR3-E-150kW (230V fans)	3-phase, 150kW, 210A@415V, 2/3rds control
A447445-HV	PR3-E-180kW (230V fans)	3-phase, 180kW, 250A@415V, 2/3rds control
T30201	Auxiliary Transformer for Failsafe Alarm	0/240/415 10-0-10V 2VA
Available on request	Spare fuses: 315A HS SCR-type (315EET)	



UNITED AUTOMATION LIMITED
 1 Southport Business Park
 Kew
 Southport, PR8 4HQ
 ENGLAND
 Tel: 0044 (0) 1704 – 516500 Main
 Fax: 0044 (0) 1704 – 516501
 Enquiry@united-automation.com
 www.united-automation.com
 Date 13/03/2017
 Page No. 2 of 2 Issue 4

